42"

[1067 mm]

Powder coated

safety yellow

YellowGate W

Three points of adjustment for optimized balance, light touch, smooth operation and easy action movement.

52"

26"

[660 mm]

[1321 mm]

11"

[279 mm]

Ultra lightweight.

> Lifts and lowers almost effortlessly.

The Most Adjustable

Barrier Gate Available.

OSHA Compliant

Part No. 108490-XL

Durable weather protection design

90° movement

Easy action

movement

PRODUCT KEY FEATURES:

- Adjustable from 6' [1829 mm] -12' [3658 mm], 42" [1067 mm] height
- Powder coated safety yellow
- Aluminum extruded, laser precision manufactured
- Lightweight and easy to raise and lower
- Maintenance free ergonomic design
- Locking pin for both the open and closed positions

Available Power Option

Available with an optional 24 volt powered lift assist system, requiring a 120 volt power supply.

- Standard 50 ft. (customer to cut to desired length) cable run from controller to gate. (max. 150 ft.)
- Retro-fitable to existing manual YGXL rev3 models.
- Easy installation with basic tools
- · Some electrical connection by customer required
- 15-20 second, 90 degree raise or lower

12' (3658 mm) **6'** (1829 mm) XL. Easily adjusts in the field from 6' (1829 mm) to 12' (3658 mm)



Preassembled OSHA compliant industrial swing gates

Easy as















YellowGate® Fall Protection

The Most Adjustable Swing Gate Available


- Universal mount for easy installation
 no additional parts to order
- OSHA compliant
- Durable built to last indoors and out
- In-stock and ready-to-ship









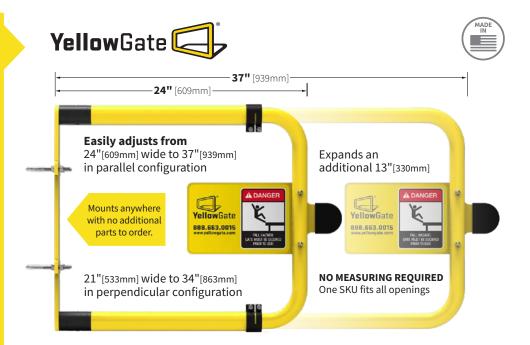



















YellowGate® can swing either in or out, with a simple in the field adjustment, for maintenance free closure, every time. Pre-Assembled & Ready to Install - straight from the box. No field cutting, drilling, or special tools required.





